

HINGS PLASTIC WOOD SERIES

興業環保膠木系列

TEL: (852) 2669 1939
FAX: (852) 2669 1792



TimberTech Decking Planks & Railing Systems

of U.S.A. Origin
直接從美國入口

5/4 Twin Finish Plank (1" 雙面實心板)

規格/ Specification :

闊度/ Width : 5 1/2" (138mm)

厚度/ Thickness : 1" (25mm)

長度/ Length : 16' (4.8M)

重量/ Weight : 20kg/pc

顏色/ Color : 雪松 (Cedar) / 淺灰 (Grey) / 紅木 (Redwood)



保用 10 年
10 Years Warranty

- 防白蟻 • Termites Free
- 不爆裂 • No Splintering
- 不腐蝕 • No Rotting




TimberTech Material Properties

Property	ASTM	Results	Results (Metric)
Flame Spread	E84	75	75
Smoke Development	E84	200	200
Burning Brand	E108-modified	Class B*	Class B*
Flash Point	D92	750 °F	398 °C
Fire Point	D92	729 °F	387 °C
Coefficient of Thermal Expansion	D696		
Width		3.41 x 10 ⁻⁵	3.41 x 10 ⁻⁵
Length		1.6 x 10 ⁻⁵	1.6 x 10 ⁻⁵
Modulus of Elasticity (psi)	AC-109, ASTM D 198		
Floorizon Plank		470000	3240 Mpa
2x6 Plank		430000	2964 Mpa
DockSider Plank	ASTM D 6109	411906	2839 Mpa
Earthwood, TwinFinish, 5/4 Plank	ASTM D 6109	438863	3585 Mpa
Modulus of Rupture (psi)	AC-109, ASTM D 198		
Floorizon Plank		3300	22.75 Mpa
2x6 Plank		2700	18.61 Mpa
DockSider Plank	ASTM D 6109	3067	21.14 Mpa
Earthwood, TwinFinish, 5/4 Plank	ASTM D 6109	3042	21.37 Mpa
HDT 264 (psi)	D648	206 °F	1.82 Mpa/96.7 °C
Vicat 1 kg	D1525	274 °F	134.4 °C
Shore D Hardness	D2240	D85	D85
Specific Gravity gm/cc	D792	1.2	1.2
Fungus Resistance (brown & white rot fungi)	D1413	1.2 rating = no decay	
Coefficient of Friction	ASTM D 2047		
dry		0.55	0.55
wet		0.88	0.88
Screw Withdraw #8 wood screw	D1761	787 lbs/in	1377.25 n/m
Water Absorption	D1037		
%vol		<1.35%	<1.35%
%mass		<1.29%	<1.29%

Job References

No.20 Stanley Beach Rd.
No.252 Ma Wan Main Rd. Village
No.9 Pik Sha Rd. Clear Water Bay
Emerald Palace, Tai Po project
HKIVE, Tseng Yi
HKIVE, Shatin
HKIVE, Haking Wong
HKIVE, Kwun Tong
City University of Hong Kong
The Vineyard
Hong Kong Sports Institute

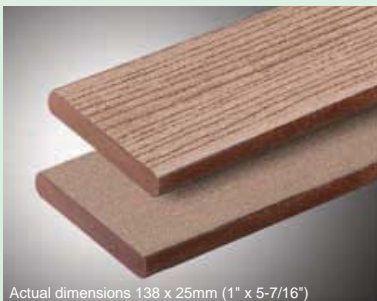

Actual dimensions 138 x 25mm (1" x 5-7/16")



現貨發售
Stocks Available

TimberTech 環保膠木條優點良多，安裝容易，適合花園、露台、天台、泳池等任何室外場合使用。
Environmentally friendly plastic wood strips are made exclusively from a technologically advanced composite material especially designed for outdoor uses, materials are durable and easy to install, please contact Hings for more information about plastic wood products.

HOTLINE : 2669 1939

尚有大量其他環保膠木產品，歡迎來電查詢。

Eco-Friendly Building Materials Specialist

興業塑膠五金製品廠

HINGS PLASTIC & METAL PRODUCTS MFY.

(Member of Hings Group of companies)

香港九龍旺角新填地街 594 號興業樓 2 樓
Tel : (852) 2669 1939 Fax : (852) 2669 1792

www.hingsgroup.com

門市及陳列室
Showroom & Retail Shop

香港九龍旺角太子道西 200 號地下及 1 樓
G/F & 1/F, 200 Prince Edward Road West, Mongkok, Kowloon, H.K.
香港灣仔駱克道 429 號置業閣地下 1 號舖
Shop No.1, G/F., Chi King Court, No.429 Lockhart Rd., Wanchai, H.K.
香港灣仔譚臣道 98 號連盛大廈地下 A 舖
Shop A, G/F., Winsan Tower, No.98 Thomson Rd., Wanchai, H.K.
香港九龍旺角新填地街 291 號地下
G/F., 291 Reclamation Street, Mongkok, Kln., H.K.
香港九龍旺角新填地街 415 號地下
G/F., 415 Reclamation Street, Mongkok, Kln., H.K.
香港九龍旺角新填地街 594 號興業樓地下
G/F., Hings Building, 594 Reclamation St., Mongkok, Kln., H.K.
香港九龍旺角廣東道 1112 - 1122 號 C 舖
Shop C, 1112-1122 Canton Rd., Mongkok, Kln., H.K.

Tel: (852) 2625 5800
Fax: (852) 2625 5801
Tel: (852) 2572 6233
Fax: (852) 2572 6234
Tel: (852) 2572 6322
Fax: (852) 2572 6323
Tel: (852) 2625 9145
Fax: (852) 2625 9146
Tel: (852) 2477 9711
Fax: (852) 2477 9731
Tel: (852) 2396 6819
Fax: (852) 2396 6891
Tel: (852) 2396 9706
Fax: (852) 2396 9707

2/F., Hings Building, 594 Reclamation St., Mongkok, Kln., H.K.
E-mail : hingspmp@hings.hk

www.hings.hk

Hings Retail Shops : Wanchai • Mongkok • Macau • Guangzhou • Shunde